


Order Sheet




Custom made door System 2000

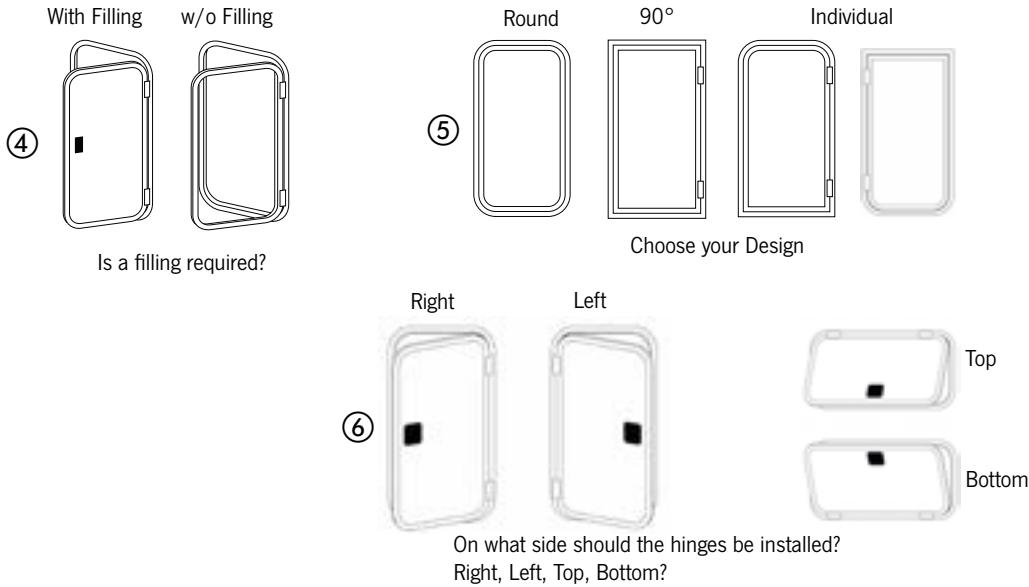

Custom made door system 2000			
Customer Number:			
	Options	Selection	Guidance
1	Width [mm] cutout		Min. Width 300 mm (with Hinges 350 mm)
2	Height [mm] cutout		Min. Height 300 mm (with Hinges 350 mm)
3	Frame Colour		White or Silver
4	Filling (Thickness 30 mm)		With Filling (only in white available) or without Filling
5	Corners		Round or 90°
6	Hinge position		On what Side should the hinges be installed (view from outside): right, left, top, bottom?
7	Lock quantity		How many locks are required?
8	Lock type		Please choose from Options below (RV Lock also available)
9	Lock system		STS/ZADI (Standard) oder FAWO HSC
10	Wall Thickness (mm)		Mounting material only available for wall thickness 28 mm to 43 mm

Toggle Clasp
for Fillings between 28-40 mm.
Article-Nr. 11496A.
For STS/Zadi Locking System.



Latch lock
for Fillings between 28-45 mm.
Article-Nr. 11515Z/C/M.
For STS/Zadi and Fawo HSC
Locking System



Caravan Lock
for Fillings between 28-35 mm.
Article-Nr. 11501A.
For STS/Zadi Locking System



Compression Push Lock
for Fillings between 28-40 mm.
Article-Nr. 11567ZD/FD.
For STS/Zadi and Fawo HSC
Locking System

