

CAMPING ACCESSORIES PROGRAM

—2022—





① Jesper series – TOP price-performance ratio

- Ideal for camping beginners
- Light and practical
- MDF tabletop in three decor variations
- With practical carrying handle

Table top: 80 x 60 cm, table height: 69 cm, tubular steel frame. Weight: approx. 3.5 kg, packing size: L x W x H 80 x 60 x 5 cm.

 Light gray
 911232
 22,96

 Dark gray mottled
 911234
 24,95

 Lime
 911233
 24,95

② Ole and Eik – camping tables with high quality aluminum table edge

- MDF table top with aluminum edge
- Available in 2 sizes: 80 x 60 cm or 120 x 60 cm
- Infinitely adjustable in height from 50 69 cm
- Loadable up to a maximum of 30 kg

Ole, 80 x 60 cm Table top: 80 x 60 cm, Table height: 50-69 cm. Weight: 7,0 kg .Packing size: L x W x H 80 x 60 x 5.5 cm. **910565 39,9**

Eik, 120 x 60 cm Table top: 120 x 60 cm, Table height: 50-69 cm. Weight: 7.4 kg. Pack size: L x W x H 120 x 60 x 5.5 cm. **910564 49,90**

③ Picnic table group for 4 people – 85 x 65 cm

- Quick assembly and disassembly
- Suitable as children's table
- · Table with recess for parasol

The picnic table can be set up in a flash and has 4 permanently installed seats that can bear a maximum load of 60 kg. The table folds in the middle to form a case with a practical carrying handle, making it easy to transport. Central umbrella hole for rain or sun umbrella. Table top: plastic (PP), frame: aluminum Dimensions: W 65 x L 86 x H 67 cm Packing size: $35 \times 86 \times 11$ cm.

Weight: approx. 6,5 kg

Color: gray. 9105486 49,94

CAMPING FURNITURE The Mc Camping folding chairs and camping chairs offer the right seating for every use Pillow · Opened and folded in just a few steps optionally available · Robust manufacturing offers high load · All chairs including carrying bag ① Ischia Young • Backrest 7-way adjustable · Lightly padded camping chair approx. 86 cm · Upholstery made of 2x1 polyester mesh, quick-drying · Frame made of coated aluminum · Loadable up to 120 kg Seat: W 44 x D 44 cm, seat height 43 cm, overall 2 dimensions: W $55 \times H107 \times D 65 \text{ cm}$. Loadable up to 120 kg. Weight: 3,8 kg. Packing size: L x W x D: 86 x 55 x 15 cm 9101543 74,90 Color dark gray approx. 15 cn Matching pillow for backrest 9101544 7.95 approx. 100 cm appr. 16 cm approx. 16 cm

② Folding chair Mahalo – the light classic

approx. 17 cm

• Extra light

approx, 104 cm

The sturdy frame made of black powdercoated steel and the high-quality black polyester material make this chair a classic among camping chairs. Loadable up to 100 kg, Dimensions: Seat W50x-D45xH42 cm. Overall dimensions: W75x-D50xH84 cm. Packing size: 84x16 cm. Weight: approx. 2,3 kg, Color: black. 920273 19,94

③ Folding chair Toledo – comfortably upholstered

• The all-round folding chair

The chair becomes even more comfortable when the pannier is stored in the head partition pocket of the backrest. Silver steel frame, cover made of high quality 600D polyester. Load capacity up to 120 kg. Dimensions: seat W57xD47xH47 cm. Total W90xD60xH103 cm. Packing size: 100xØ16 cm.

Weight: approx. 3,2 kg. Color: black/grey. **920292 34,90**

4 Folding chair Toledo XL loadable up to 180 kg

- Very stable steel frame
- 2 cup holders/headrest with zipper

Due to very stable steel frame (Ø22 mm) loadable up to 180 kg. Dimensions: seat W57xD50xH49 cm, total W105xD60xH105 cm. Packing size: 104xØ17 cm. Weight: approx. 4,5 kg. Color: black.920293 49,94

⑤ Pesaro director's chairclassic and lightweight

approx. 15 cm

- Sturdy aluminum frame
- · Space-saving stowable
- · Safety folding mechanism

The classic director's chair with comfortable padded armrests and light weight. Space-saving stowable. Cover: 100% polyester, loadable up to 120 kg. Dimensions: seat W47x D34 x H46 cm, overall dimensions: W56 x D49 x 82 cm, packing size: W76 x D49 x H15 cm, weight: approx. 2.2 kg. Color: black. 961005 41.90




COMPRESSOR-REFRIGERATOR


COOL'N'HEAT 10

- *Combi unit with cooling and heating function in one
- *Operation via large LCD touch display
- · Wide handle for easy transport
- Includes 12/24 V connection cable

Useful capacity	10
Ø Current consumption	12 V: 4.0 A / 24 V: 2.0 A
Ø Power consumption	45 W
Temperature range	
Cooling / Heating	Max20 °C / Max. +50 °C
Operating volume	< 45 dB
Dimensions (LxWxH) mm	410 x 355 x 288
Weight (approx.)	8 kg
Item no.	713545
Price	425,-

Available: Quarter 2/2022





AC adapter cable (100-240V)

enables operation with 230 V voltage

714499 24,89


COMPRESSOR-REFRIGERATOR

STYLE'N'COOL 20 + 26

- Chic design in white/black
- Cooling capacity: +20°C to -20°C
- Includes 12/24 V connection cable

The height of the coolers is such that they fit under the front end of the Reimo seat/sleeper benches V3000 and V3100 folded into a bed.

Useful capacity	20 I	26
Ø Current consumption	12V: 5.0 A / 24V: 2.5 A	12V: 5.0 A / 24V: 2.5 A
Ø Power consumption	60 W	60 W
Temperature range	+20 °C to -20 °C	+20 °C to -20 °C
Operating volume	< 45 dB	< 45 dB
Dimensions (LxWxH)mm	585 x 335 x 292	585 x 335 x 352
Weight (approx.)	11 kg	13 kg
Item no.	71449	714491
Price	279,–	319,–




AC adapter cable (100-240V) enables operation with 230 V voltage

714499 24,89



USB socket

LCD touch display

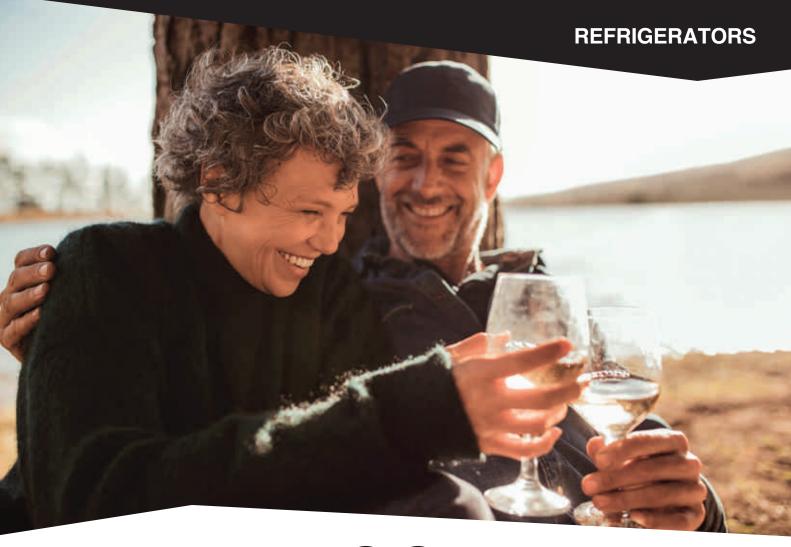


COMPRESSOR-REFRIGERATOR


MC-65L

- Door stop left or right freely selectable
- Brand compressor from LG
- Door panel in matt black

Usable capacity total	65 I
Refrigerator/freezer	52 / 13
Ø Current consumption	12V: 5.0A / 24V: 2.5A
Ø Power consumption	60 W
Temperature range	
Refrigerator/freezer	+8 °C to 0 °C / -20 °C
Weight	approx. 20 kg
Item no.	713512
Price	529,-


Available: Quarter 2/22







SOLARTECHNICS

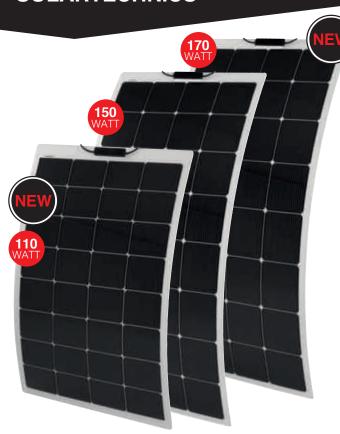

ORDER ALSO: MC4 solar connector set

Special plug set for single-core cables 2.5 - 6 mm2. With snap-in locking. Voltage up to max. 1000 V. Current up to max. 30 A. Scope of delivery: 1x plug and 1x socket. Temperature range -40 °C to 90 °C 84052 4.95

BASIC PANEL FLEX

MC-110 + MC-150 + MC-170











- Top price-performance ratio
- 110 W, 150 W or 170 W power
- High power generation, low weight
- Monocrystalline cells
- PET top layer
- TPT carrier plate
- Incl. pre-installed 90 cm connection cable (4.0 mm²)
- With MC4 solar plug + socket



	MC-110	MC-150	MC-170
Power / Mono cells	110 W	150 W	170 W
Short circuit current (Isc)	6,67 A	10,65 A	10,32 A
Open circuit voltage (Voc)	21,12 V	20,5 V	21,12 V
Rated voltage (Vmp)	18 V	18 V	18 V
Rated current (Imp)	6,14 A	8,83 A	9,48 A
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Dimensions in mm LxWxH	955x700x2,5	1350x690x2,5	1370x700x2,5
Connection cable (4.0 mm2)	0,9 m	0,9 m	0,9 m
Weight	approx. 2,5 kg	approx. 3.2 kg	approx. 3,5 kg
Carrier plate color	White	White	White
Art. No.	853412	853411	853413
Price	219,–	329,-	349,–

SOLAR-SETS BLACK


MC-100 + MC-140


- All components are optimally matched to each other
- Aluminum holding profile (black) already pre-installed
- 6 m cable (2x 2.5 mm2) pre-installed
- Solar charge controller with USB port (5 V, 1.2 A)
- Complete black design
- Performance guarantee: 80% power left after 25 years

Solar complete set 100 W and 140 W in black design The sets include a solar module with pre-installed aluminum Holding profile (spoiler), pre-installed 6m solar cable, roof feed-through and solar charge controller 12 V/10 A. All components are optimally matched to each other and thus ensure reliable operation

	MC-100	MC-140	
Power	100 W	140 W	
Efficiency	19,60%	20,70%	
Short circuit current (Isc)	6,00 A	8,40 A	
Open circuit voltage (Voc)	21,6 V	21,6 V	
Rated voltage (Vmp)	18 V	18 V	
Rated current (Imp)	5,55 A	7,77 A	
Operating temperature	-45 °C ~ +80 °C	-45 °C ~ +80 °C	
Dimensions solar panel incl. spoiler (LxWxH)	1353x508x35/64 mm	1370x688x35/64 mm	
Cable (2x 2,5mm2) pre-installed	6 m	6 m	
Weight	approx. 10 kg	approx. 12 kg	
Solar charge controller: LS1012EU, 12V/10A, max. solar module voltage 30V, 1x USB port 5V 1.2A			
Art. No.	84033	84034	
Price	229,–	299-	









SINUS INVERTER

SI-1500 + SI-2000

- Conversion from 12 V to 230 V sinusoidal voltage
- USB connection 5 V, 2.1 A
- \bullet Connection cables included (2x 0.8 m, Ø25 mm²/ Ø35 mm²)
- Wired remote control included

With the McCamping inverters you convert 12 V on-board current of your camping bus or motorhome into 230 V sine voltage. This way you can use common devices like coffee machine, TV or hairdryer as usual dryer can also be used as usual in camping vehicles

Integrated USB port (5 V, 2.1 A). Safety is provided by the polarity polarity, overvoltage and short-circuit protection. The integrated fan protects against overheating. Acoustic warning signal for low battery level

Туре	SI-1500	SI-2000
Input voltage DC	12 V	12 V
Output voltage (±5%)	230 V	230 V
Continuous power	1500 W	2000 W
Peak power short term	3000 W	4000 W
Connection cable remote control	yes	yes
USB port/ampere	5V/2.1 A	5V/2.1 A
Sockets**	1x Schuko 1x Universal	1x Schuko 1x Universal
Connection cable included	2x 0.8 m (25 mm²)	2x 0.8 m (35 mm²)
Dimension (LxWxH) mm	360x230x100	390x230x100
Weight approx	3,9 kg	4,0 kg
ArtNo.	82270	82271
Price	299–	399,–

^{*}Approved for installation in vehicles (Emark and CE certified).

















^{**}Not designed for simultaneous operation!



Discover the complete **McCamping assortment** also in our online store www.reimo.com/mc-camping

Scan QR code and quickly Find the product you want

- 1. Enter article number in the search
- 2. Order article
- 3. Pick up at your local dealer or have it delivered to your home



REIMO REISEMOBIL-CENTER GMBH BOSCHRING 10 - 63329 EGELSBACH - GERMANY

MC CAMPING IS A REGISTERED TRADEMARK OF THE COMPANY REIMO REISEMOBIL-CENTER GMBH. Copyright: Reimo Reisemobil-Center GmbH. Delivery subject to change. All products without decoration. Printingerrors and omissions excepted. Subject to technical changes and further developments. All data without guarantee. All prices in Euro. The permissible tolerance for technical data is +/- 5%. Illustrations partly show extras and decorations that are not included in the scope of delivery. All pribar erserved. Reprint as well as use in electronic media, also in extracts, only with express permission of the Reimo Reisemobil-Center GmbH, Egelsbach

Status March 2022

